
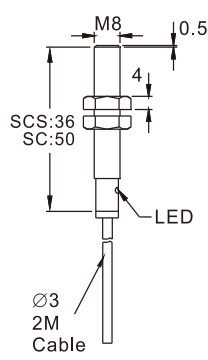
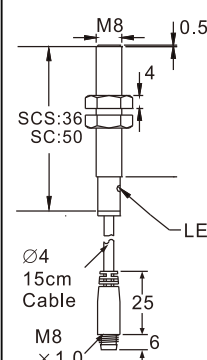
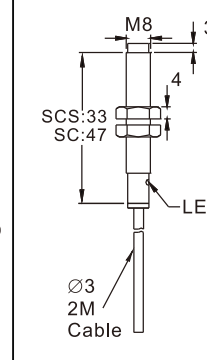
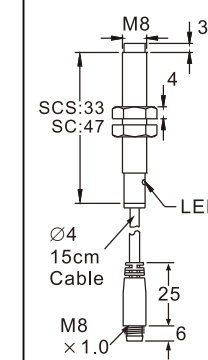
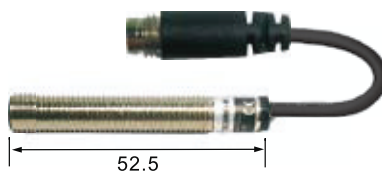








◆Specifications / 規格表 :

Photo Sensor	SCS0801-□ 				
Area Sensor	SC0801-□D 				
Inductive Proximity Sensor	SCS0802-□ 				
Capacitive Proximity Sensor	SC0802-□ 				
Timer / Counter	<p style="text-align: center;">52 <unit:mm></p>	<p style="text-align: center;"><unit:mm></p>	<p style="text-align: center;"><unit:mm></p>	<p style="text-align: center;"><unit:mm></p>	<p style="text-align: center;"><unit:mm></p>
Others	Output method / 輸出模式	NPN N.O. SC□0801-N	NPN N.C. SC□0801-N2	PNP N.O. SC□0801-P	PNP N.C. SC□0801-P2
		NPN N.O./N.C. SC□0801-N2	NPN N.C. SC□0801-P2	PNP N.O./N.C. SC□0801-P	PNP N.C. SC□0801-P2
		SCR N.O.	SCR N.C.		
Accessories	Sensing type / 檢出方式	Shielded / 隔離型		Unshielded / 非隔離型	
	Description / 外型	Standard / 標準M8			
	Standard sensing object / 標準檢測物	Iron 8 × 8 × 1 mm			
	Sensing distance / 檢出距離	1 mm		2 mm	
	Secure sensing distance / 建議距離	0 to 0.8 mm		0 to 1.6 mm	
	Hysteresis / 遲滯	≤ 10 % of sensing distance			
	Response time / 反應時間	1 ms Max.			
	Operating voltage / 工作電壓	DC12 ~ 24 V			
	Current consumption / 消耗電流	≤ 8 mA no-load			
	Load current / 負載電流	100 mA Max at DC 24V			
	Leakage current / 漏電流	≤ 1.1 mA no-load			
	Residual voltage / 殘餘電壓	≤ DC 1.5V			
	Insulation resistance / 隔離阻抗	20MΩ min. (DC500V)			
	Voltage withstandability / 絕緣耐壓	AC1000V 60Hz for 60 Sec.			
	Operating temperature / 工作溫度	-20°C ~ + 60°C			
	Protection degree / 防水等級	IP 66			
	Wiring method / 出線方式	Pre-wired Ø3 x 2M / 3-wires	M8 pigtailed type / M8接頭15cm電線式	Pre-wired Ø3 x 2M / 3-wires	M8 pigtailed type / M8接頭15cm電線式
	Weight / 重量	Approx.30g	Approx.12g	Approx.30g	Approx.12g